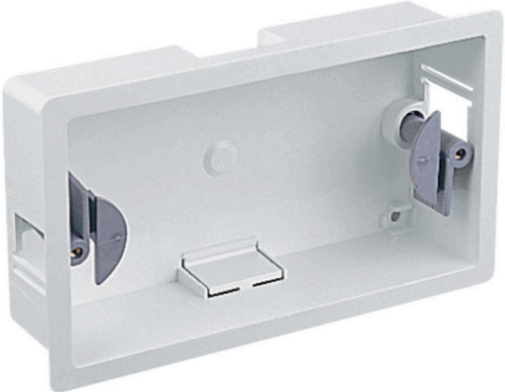


## Dry Lining Box 2 Gang STD Product Data Sheet

Product Range	MDLB2 & MDLB8	<p>Image for reference only</p> 
Description	Dry Lining Box 2 Gang STD	
Key Features	<p>Wide securing flange.</p> <p>To suit board thickness from 6mm to 14mm (MDLB2)</p> <p>To suit board thickness from 18mm to 25mm (MDLB8)</p> <p>Swivel snap out clamps</p> <p>Multiple Entry points</p> <p>Available with intumescent fire barrier pads</p>	
Dimensions	<p>83mm x 143mm over flange</p> <p>34mm deep</p> <p>To suit hole size 75mm x 135mm</p>	
Material(s)	PVCu with Brass Inserts	
Compliance / Standards(s)	<p>CE &amp; UKCA Marked</p> <p>Low Voltage Directive 2014/35/EU</p> <p>The Electrical Equipment (Safety) Regulations 2016</p> <p>BS 7671:2018</p> <p>BS 5733:2010+A1:2014</p> <p>BS 476-22:1987 when fitted with intumescent fire barrier pads</p>	
Packaging	Recyclable	

### Sustainability

We work hard to ensure our products meet the highest standards and are totally committed to the environment and maximising our usage of recycled material within our manufacturing process.

Our PVC-U products are manufactured from an average of 80% recycled plastic, with some extruded products produced from 100% recycled material.

Dry Lining Boxes are manufactured from PVC-U, a material that is 100% recyclable, is flame retardant and self-extinguishing.

○ To find out more about the percentage of recycled material used in this product, please visit [marshall-tufflex.com](http://marshall-tufflex.com)

