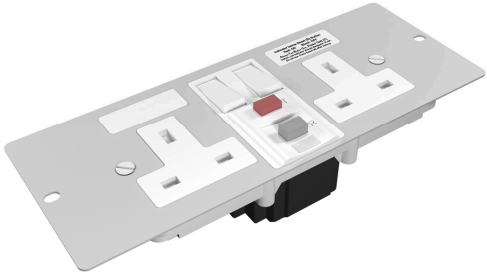



Floor Box RCD Twin Socket 4 Compartment STD

Product Range	UP760	<p>Image for reference only</p> 
Description	<p>Floor Box RCD Twin Socket 4 Compartment Std</p> <p><i>Note: Not suitable for use with the In-Screed flooring system</i></p>	
Key Features	<p>13A Latching RCD DP (Type A)</p> <p>Rated Voltage: 220-250V</p> <p>Frequency: 50-60Hz</p> <p>IP Rating: IP2X</p> <p>Rated fault current: 30mA</p> <p>Ambient Operating Temperature: -5 to 40°C (24Hr average not exceeding 25°C)</p>	
Dimensions	<p>Terminal Capacity: 3 x 2.5mm 3 x 4.0mm 2 x 6.0mm</p> <p>Minimum box depth: 35mm</p>	
Material(s)	Painted steel plate	
Compliance / Standards(s)	<p>BS 7671:2018</p> <p>BS 7288:2016</p> <p>BS 1363-2:2016+A1:2018</p>	
Packaging	Recyclable	

Sustainability	
RoHS Compliant	 <p>WEEE Compliant</p>